

SUBMITTAL DATA: PLA-A36AA & PUZ-A36NHA
36,000 BTU/H CEILING CASSETTE HEAT PUMP SYSTEM

Job Name: _____	Location: _____	Date: _____
Purchaser: _____	Engineer: _____	
Submitted to: _____	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Unit Designation: _____	Schedule No.: _____	

GENERAL FEATURES

- Limited warranty: one year on parts and defects and six years on compressor
- Compact side-discharge outdoor unit
- Zone control
- Hard-wired, wall-mounted remote controller (PAR-21MAA)
- Automatic fan speed control
- Quiet operation – both indoor and outdoor units
- Auto restart following a power outage
- Self check function – integrated diagnostics
- Advanced microprocessor control
- Auto changeover for cooling and heat

Cooling

Rated capacity	36,000 Btu/h
Minimum capacity	12,000 Btu/h
SEER	13.1 Btu/h/W
Total input	4510 W
Power supply	208 / 230V, 1 Phase, 60 Hz
Breaker size	30 A

Heating

Rated capacity	37,000 Btu/h
Minimum capacity	12,000 Btu/h
Total input	3490 W
HSPF (I/V) (Btu/h/W)	8.3 / 6.7
COP	10.6 Btu/h/W

Voltage

Indoor - outdoor S1-S2	AC 208/230V
Indoor - outdoor S2-S3	DC 24V
Indoor - remote controller	DC

Indoor unit


MCA	2 A
Fan motor	0.79 F.L.A.
Fan motor output	70 W
Airflow (Lo-M1-M2-Hi)	710-810-920-990 Dry CFM
	670-770-880-950 Wet CFM
Sound (level) (Lo-M1-M2-Hi)	28-30-32-34 dB(A)

DIMENSIONS

		UNIT	PANEL
inches	W	33-1/16	37-3/8
	D	33-1/16	37-3/8
	H	10-3/16	1-3/16
mm	W	840	950
	D	840	950
	H	258	30

Weight (unit/grille)

Pounds	66 / 11
Kg	30 / 5

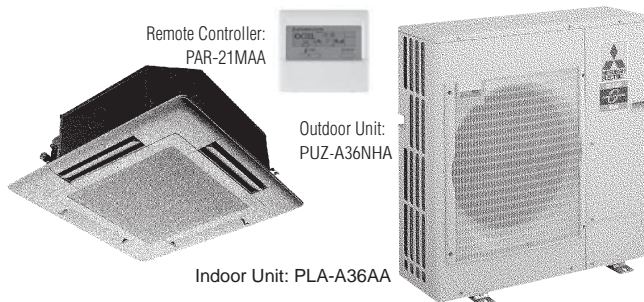

Field drain pipe Size I.D. (inches/mm) 1 / 25.4
Wall-mounted remote controller PAR-21MAA
 (see data submittal sheet)

Outdoor unit

Compressor	DC inverter/twin rotary MCA
Fan motor	0.75 F.L.A.
Sound level	48 dB(A)

DIMENSIONS

	INCHES	MM
W	37-3/8	950
D	13 + 1-3/16	330 + 30
H	37-1/8	943

Weight (lbs/Kg)	165 / 75
Refrigerant type	R410A
Refrigerant pipe size O.D. (inches/mm)	
gas side	5/8 / 15.88
liquid side	3/8 / 9.52
Max. refrigerant pipe length (ft/m)	165 / 50
Max. refrigerant pipe height difference (ft/m)	100 / 30
Connection method	flared

NOTES :

*1. Rating conditions (cooling)-indoor : D.B. 80°F, W.B. 67°F
 outdoor : D.B. 95°F, W.B. 75°F.

*2. Rating conditions (heating)-indoor : D.B. 70°F, W.B. 60°F outdoor : D.B. 17°F, W.B. 15°F.

Operating range

		Indoor intake air temp.	Outdoor intake air temp.
Cooling	Maximum	D.B. 95°F, W.B. 71°F	D.B. 115°F
	Minimum	D.B. 67°F, W.B. 57°F	D.B. 0°F *
Heating	Maximum	D.B. 80°F, W.B. 67°F	D.B. 70°F, W.B. 59°F
	Minimum	D.B. 70°F, W.B. 60°F	D.B. 12°F, W.B. 10°F

* With wind baffle installed. If not installed, the minimum temperature will be 23°FDB.



Notes:

