Job Name :	Location :
Purchaser :	P.O. No. :
Engineer :	Architect :
Submitted To :	Date :
Submitted By :	For : ☐ Reference ☐ Approval ☐ Construction
Unit Designation : Schedule No.:	Model No.:

Submittal Data : LS090CE

Capacities :

Cooling	9,000 Btu/h
Outdoor Design Temp.(°F,DB/WB)	
Cooling	95/75
SEER	13
EER	11.5

Indoor Unit :

Power Supply (V,Ph,Hz)	36V DC
Maximum Fuse Size	Powered by
Minimum Ampacity	Outdoor Unit
Weight (lbs)	15.4
Sound (dB(A),H/M/L Cool)	36/31/28
Air Circulation (CFM)	250
Dehumidification (pts/hr)	2.6

Outdoor Unit :

Power Supply (V,Ph,Hz)	115,1,60
Maximum Fuse Size	15
Minimum Ampacity	7.0
Weight (lbs)	66.1
Sound (dB(A), High Cool)	48

Refrigerant Piping :

Maximum Length (ft)	50
Maximum Height Difference (ft)	25
Liquid Side (O.D)	1/4”
Gas Side (O.D)	3/8”

Standard Features :

- Five Year Compressor Warranty
- Two Year Functional Parts Warranty
- R-410a Refrigerant
- Triple Filter Air Purifying System
- Chaos Swing Air Circulation
- Jet Cool ™
- LCD Wireless Remote Controller
- Auto Restart
- 24 Hour On/Off Timer
- Built-in Low Ambient Control down to 0°F
- Temperature Display on Indoor Unit

Note :

LSN090CE

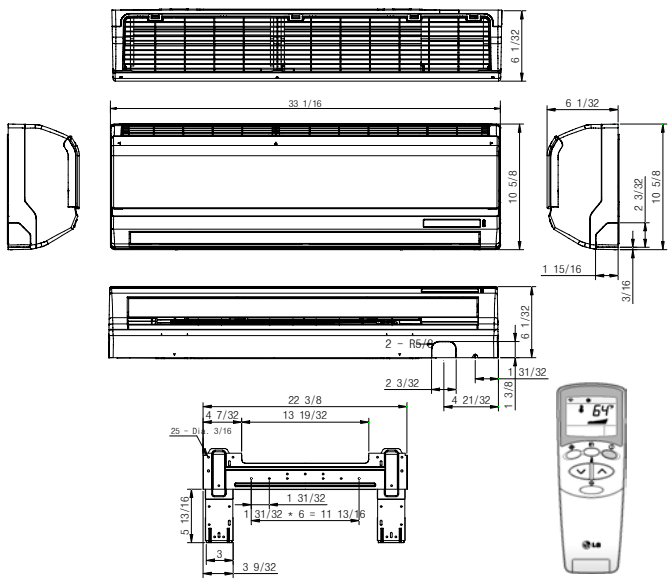

LSU090CE

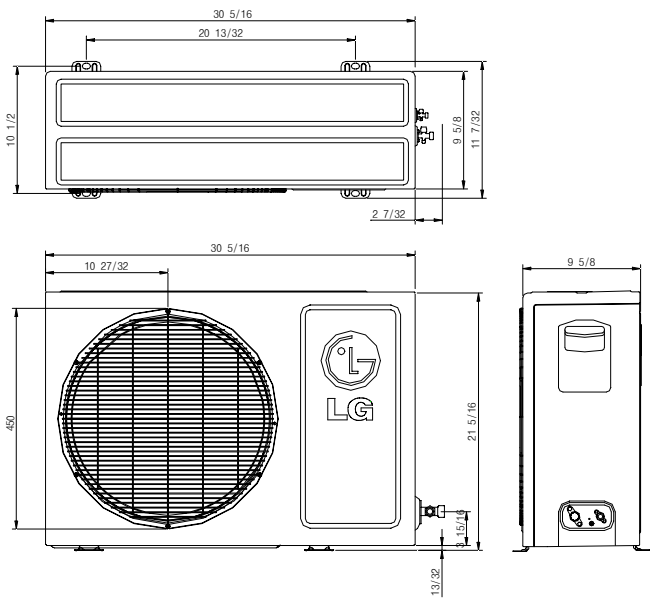

© LG Electronics USA 2006